

Alarm for gas leak detection on permanent connection



Optical and acoustic alarm.

- Acoustic alarm stop button.
- Sensitivity variator button for on site unit adjustment by the installer.
- Auxiliary relay allowing alarms to be remotely activated from the AKO-5605A centralizer
- Not suitable for areas classified as potentially explosive atmospheres.


Reference	Description	Family	Pack
AKO-52092	Gas detector alarm, permanent connection	4200	4 Units

Centralisation alarm for 5 input circuits



Autonomy over one hour with automatic Ni-Cd battery recharging.

- When one of the circuits is closed, the acoustic alarm is activated and also one of the 5 optical indications to show which circuit is sending the signal. The acoustic may be stopped, but not the optical, which remains active and in the memory until the signal circuit is opened.
- The units may be installed adjacently to form centres of up to 5, 10, 15, etc. signals.
- Power supply 230V ±10%, 50/60 Hz.

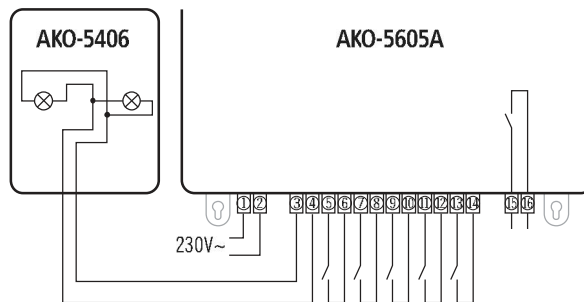

Reference	Description	Family	Pack
AKO-5605A	Centralizer for 5 input circuits	4200	1 Unit